


## MINIBREAKOUT 12-24 FO

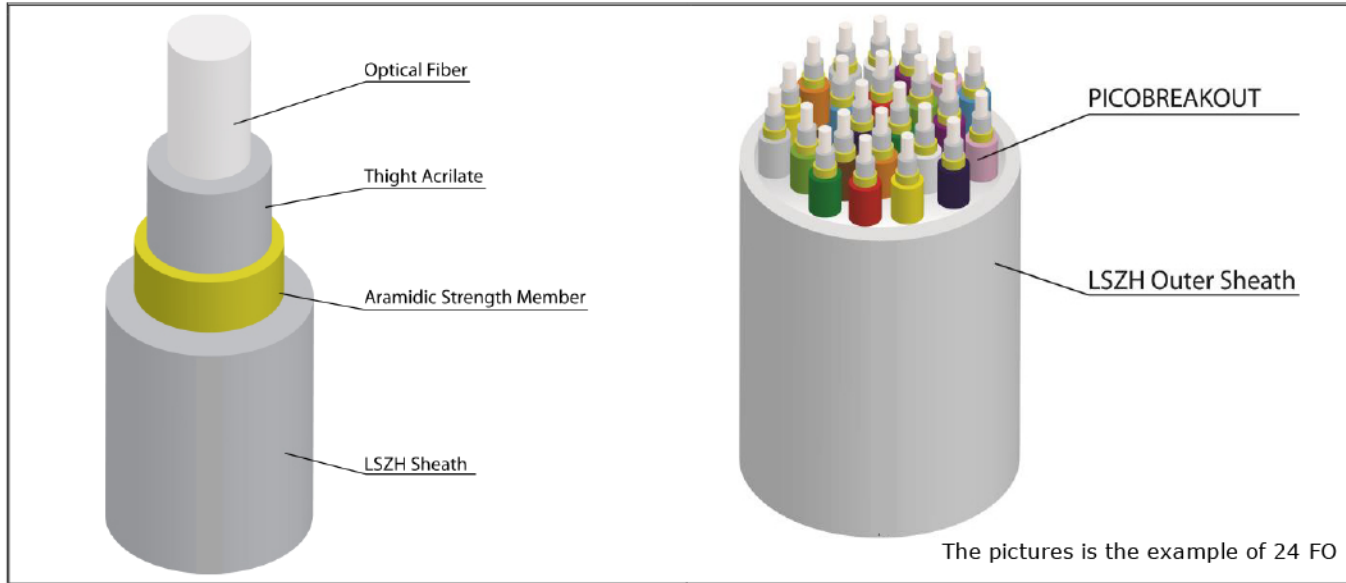

### 1. COLOUR CODE

ACCORDING TO NORMS OF REFERENCE

### 2. GENERAL CHARACTERISTICS

	UM	VALUE	
		12 FO	24 FO
N° PICOBREAKOUT	-		
	-	(nom. PICOBREAKOUT diam. 0,875±0,10 mm)	
Min. outer sheath thickness	mm	1,3	1,2
Outer sheath material		<b>LSZH</b>	
Nominal diameter	mm	6,4	8,5
Nominal weight	kg/km	40	60

### 3. CABLE PERFORMANCES

TEST	NORME DI RIFERIMENTO	VALORI
Min. Bending Radius	<b>IEC 60794-1-2 E10</b>	5 x Cable O.D.
Tensile strenght	<b>IEC 60794-1-2 E1</b>	400 N Δ att. ≤0,1db/km
Crush	<b>IEC 60794-1-2 E3</b>	500 N Δ att. ≤0,1db/km
Impact	<b>IEC 60794-1-2 E4</b>	Energy: 1 J N° impact: 3 Δ att. ≤0,1db/km
Temperature cycle	<b>IEC 60794-1-2 F1</b>	-10°C/+60°C Δ att. ≤0,1db/km

### 4. NORMS OF REFERENCE

- OPEN FIBER ST 1730
- ITU-T G657A2
- EN 50575

### 5. OUTER SHEATH MARKING

ACCORDING TO NORMS OF REFERENCE